


Installation Manual KomyMirror for Parking Lot

Screw-Fixed Type
(F15B/F33B/F48B/F60B)

Thank you for purchasing our product. Although we do our utmost to prevent defects by carrying out exhaustive inspections, should you find any defect, please contact Komy at info@komy.co.jp. Please note that improper installation may result in the mirror falling off unexpectedly. Please read through the instructions below for proper use.

Positioning the mirror

- Have two people check the mirror's field of view.
- Be sure to fix the mirror near the road with the arrow pointing to the road.
- Driver's eye level

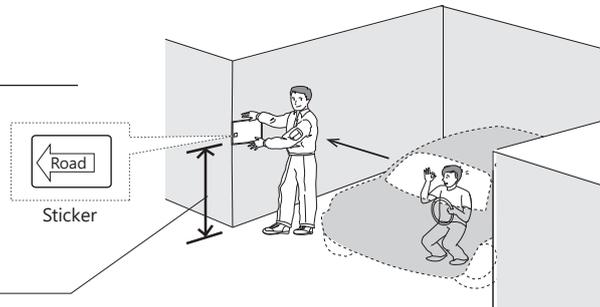

How to Install Accessories : Outer frame / 4×30 flat-head self-tapping screw × 4 / Nylon plug × 4

<p>1</p> <p>(1) Drill four holes 6 mm in diameter and 30 mm in length with a drill for concrete.</p> <p>(2) Insert the nylon plugs included in the product package.</p>	<p>2</p> <p>Screw the outer frame to the four plugs.</p> <p>Caution Tighten the screws fully so that their heads do not stick out. If they stick out more than the thickness of the strong adhesive tape (1.1 mm), the mirror is not fully adhered to the frame.</p> <p>*The plates around the screw holes may deform to some extent. This product can be installed without a problem as long as the frame (the surface with the strong adhesive tape) is not deformed.</p>	<p>3</p> <p>Remove the release paper from the strong adhesive tape and put the mirror into the outer frame.</p> <p>Caution Firmly press the area where the strong adhesive tape is placed in order to fix the mirror securely. (Insecure fixation may lead to it falling off.)</p> <p>Ensure that the arrow point to the road. Remove the sticker after installation.</p>	
--	---	---	--

Caution	<ul style="list-style-type: none"> • This product must be fixed with outer frame and screws. Using the mirror alone may result in it losing its function as a mirror or falling off. • Do not use in a place exposed to strong ultraviolet rays emitted from germicidal lamps or other sources, nor in a place where oil mist, strong acid, or alkali is generated. • Do not use petroleum solvents such as thinner, gasoline, kerosene, and lacquer (otherwise the product loses its function as a mirror). • Installation on an uneven surface may result in the deformation of the outer frame, causing the mirror to fall off and images to distort.
Regular inspections	<ul style="list-style-type: none"> • Inspect the mirror regularly. Wipe off any dust or dirt with a commercially available glass cleaner.
Characteristics (Points to be aware of)	<ul style="list-style-type: none"> • Reflected images may look distorted when viewing KomyMirror while moving or from a distance. • By its nature, KomyMirror may have small scratches that do not affect visibility. • Due to its special composition, KomyMirror is inferior in sharpness to a convex mirror. However, this does not affect visibility. • In the direct rays of the sun or other light sources, KomyMirror may be difficult to look at depending on the angle.

Caution Failure to follow a caution indicated by this symbol and mishandling may result in personal injury or only property damage.